Cleaning Solvents
Rtx®-VMS

1. methanol
2. ethanol
3. *iso*-propanol
4. *tert*-butanol
5. *n*-propanol
6. *iso*-butanol
7. methyl Cellosolve®
8. *n*-butanol
9. Cellosolve®
10. ethylene glycol
11. butyl Cellosolve®
12. limonene
13. dipropylene glycol monomethyl ether (DPGMME)
14. diethylene glycol ethyl ether (DEGEE)
15. phenyl Cellosolve®
16. tripropylene glycol monomethyl ether (TPGMME)

Rtx®-VMS, 60m, 0.25mm ID, 1.4µm (cat.# 19916)

Sample:	1% each solvent in methanol
Inj.:	1.0µL split (split ratio 100:1), 4mm inlet liner (cat.# 20814)
Inj. temp.:	250°C
Carrier gas:	hydrogen, constant flow
Flow rate:	1.5 mL/min.
Oven temp.:	60°C (1 min. hold) to 138°C @ 4°C/min., to 145°C @ 2°C/min., to 210°C @ 15°C/min., to 230°C @ 5°C/min.
Det.:	FID @ 250°C

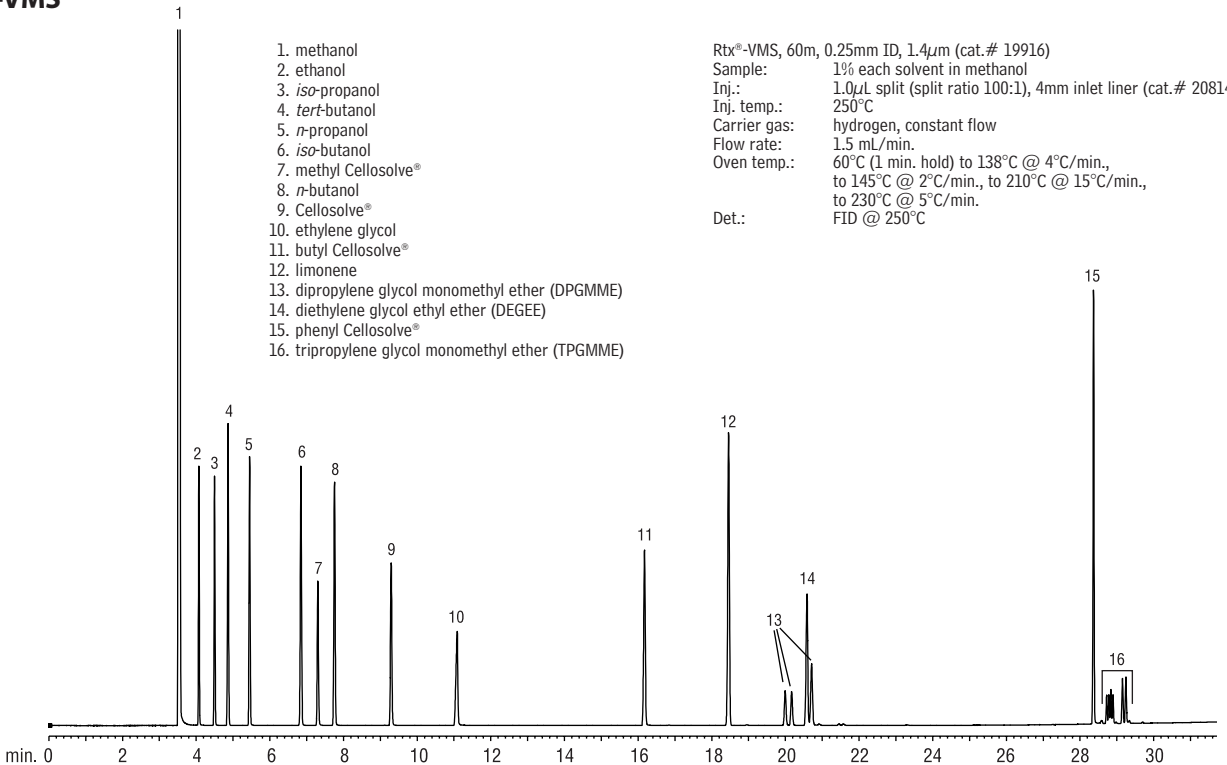

GC_FF00645

Restek Corporation 110 Benner Circle Bellefonte, PA 16823
814-353-1300 • 800-356-1688 • Fax: 814-353-1309 • www.restek.com