


Biodiesel (B100) on MXT®-Biodiesel TG by ASTM D6584

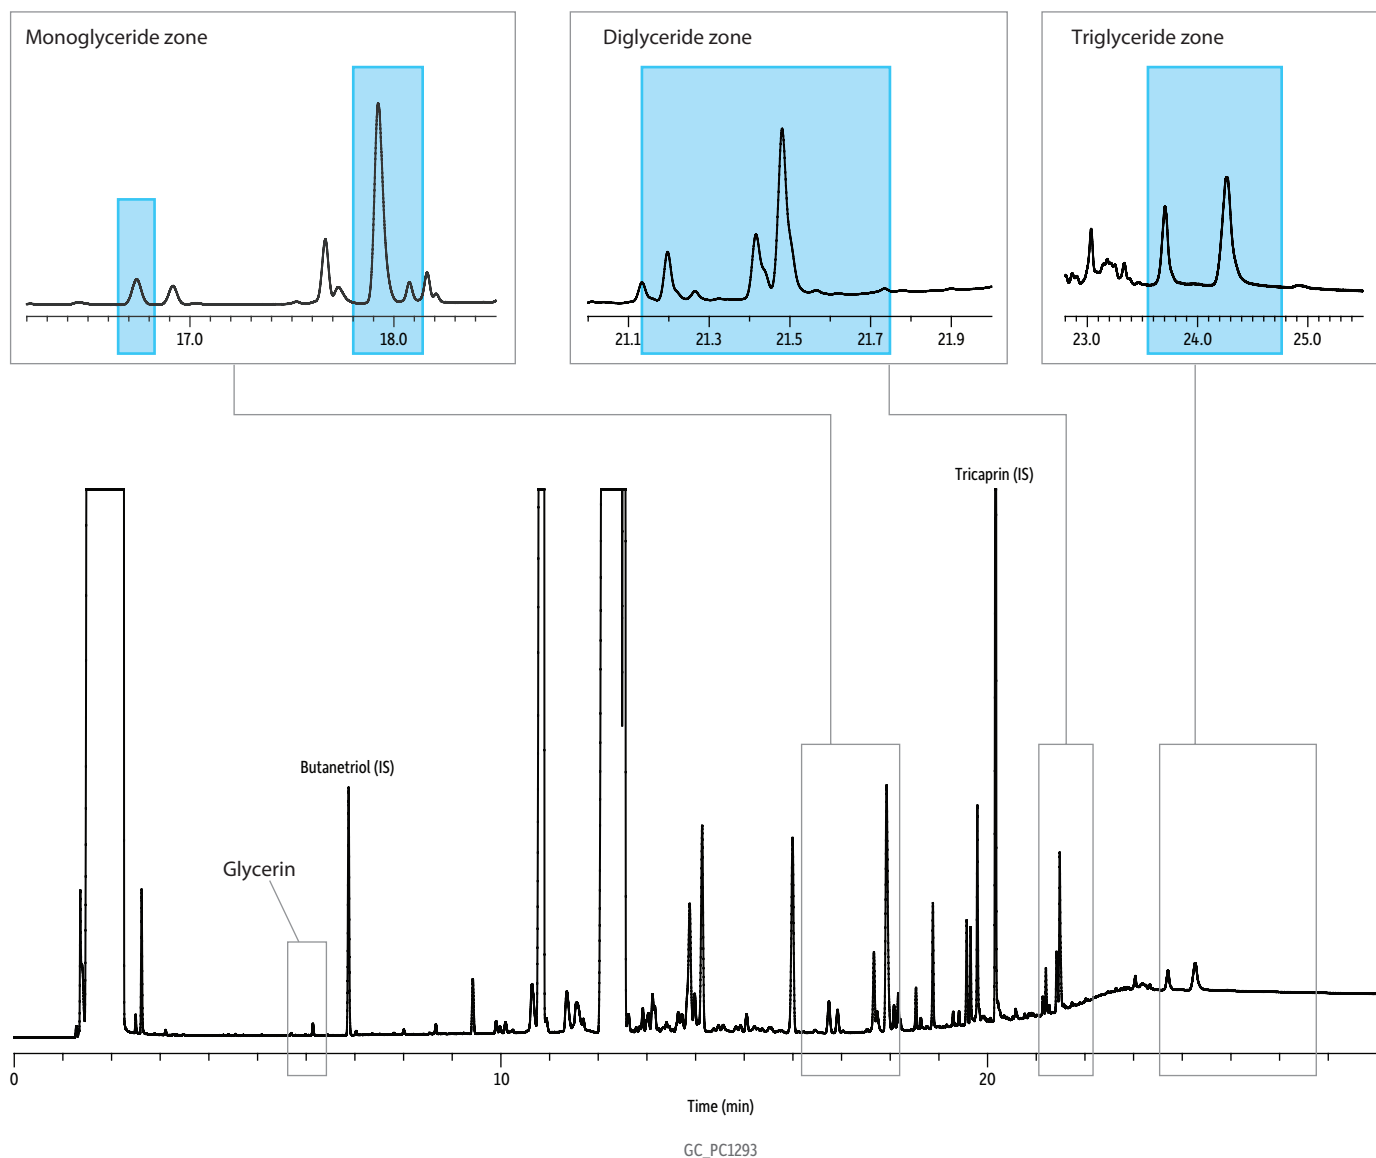

Column	MXT®-Biodiesel TG with 2 m Integra-Gap® (integrated retention gap), 16 m total length, 0.53 mm ID, 0.16 µm (cat.# 70289)
Sample	Biodiesel (B100), derivatized
Diluent:	Heptane
Injection	
Inj. Vol.:	1 µL cold on-column
Temp. Program:	Oven track
Oven	
Oven Temp.:	50 °C (hold 1 min) to 180 °C at 15 °C/min to 230 °C at 7 °C/min to 380 °C at 30 °C/min (hold 5 min)
Carrier Gas	He, constant flow
Flow Rate:	3 mL/min
Detector	FID @ 380 °C
Instrument	Agilent 7890A GC